


SPECIFICATIONS		
Nominal Voltage		3.6 V
Nominal Capacity		19 Ah
Max. Continuous Current		230 mA
Pulse Capability		400 mA
Temperature Range	Operating Temperature Range	-55~85°C
	Storage	Max. 30°C
Weight		Approx. 100 g
Dimensions		Max. 61.5 x 33.1mm

PRODUCT FEATURE

- High and stable operating voltage.
- High minimum voltage during pulsing.
- Low self discharge rate (less than 1% after 1 year of storage at +25°C)
- Stainless steel container.
- Hermetic glass-to-metal sealing.
- Non-flammable eletrolyte.
- Compliant with IEC86-4 safety standard and EN 50020 intrinsic safety.

CHARACTERISTIC CURVES


1.DISCHARGE CHARACTERISTICS@+25°C

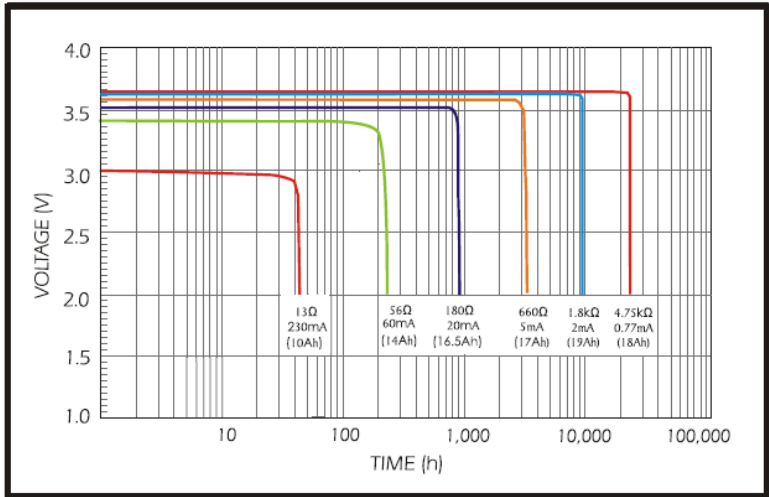


Tenergy Corporation

436 Kato Terrace, Fremont, CA 94539 U.S.A Tel: 510.687-0388 Fax: 510.687.0328 www.Tenergy.com email: sales@Tenergy.com
 Specifications and data are subject to change without notice. Contact Tenergy for latest information. ©2014 Tenergy Corporation. All rights reserved.

2. VOLTAGE VS. TEMPERATURE

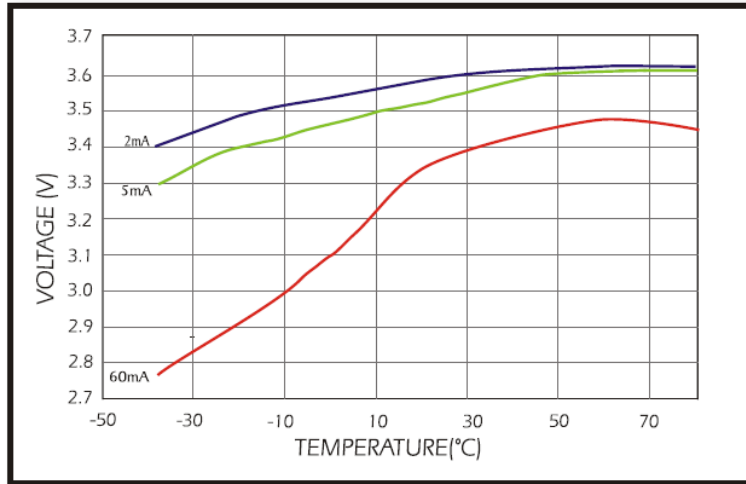

3. CAPACITY VS. CURRENT

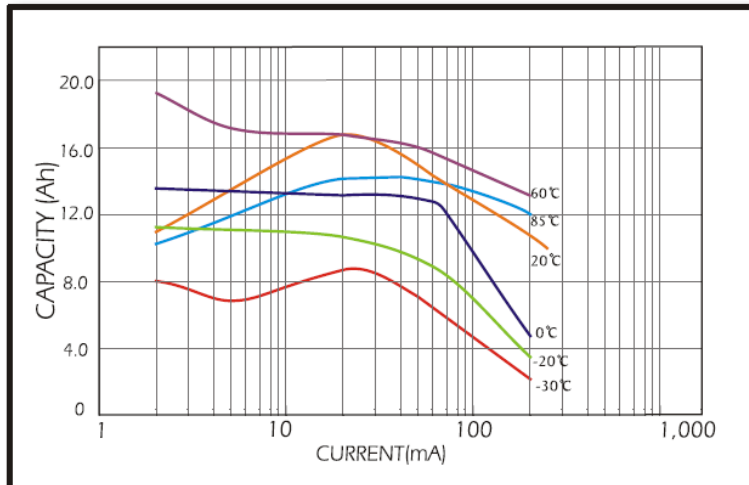

4. STORAGE CHARACTERISTICS

