



**Tenergy Corporation**

436 Kato Terrace

Fremont, CA 94539 U.S.A

Tel: 510-687-0388 ext 308 Fax: 510-687-0328

[www.tenergybattery.com](http://www.tenergybattery.com) email: sales@tenergybattery.com

## Primary lithium batteries ER34615

3.6V Primary lithium-thionyl chloride  
(Li-SOCl<sub>2</sub>) Energy type  
D-size bobbin cell

For low drain / long time applications requesting superior voltage response in -55°C~+85°C environments.

### Cell size references

( UM1 - R20 - D )

Alternative models LS33600/LS33600C/LS33600LM/TL4930/SB-D01/SB-D02

Electrical characteristics (typical values relative to cells stored for one year or less at +30°C max.)	
Nominal capacity (at 3 mA +20°C 2.0V cut off. The capacity restored by the cell varies according to current drain, temperature and cut off).	18.5Ah
Open circuit voltage (at +20°C)	3.66V
Nominal voltage (at 3mA +20°C)	3.6V
Pulse capability: Typically up to 400 mA (400 mA/0.1 second pulses drained every 2 mn at +20°C from undischarged cells with 10 µA base current, yield voltage readings above 3.0V. The readings may vary according to the pulse characteristics, the temperature, and the cell's previous history. Fitting the cell with a capacitor may be recommended in severe conditions. )	
Max. Continuous current	200mA
Max. Pulse current	400mA
Storage (recommended) (for more severe conditions)	+30°C max
Operating temperature range (Operation above ambient T may lead to reduced capacity and lower voltage readings at the beginning of pulses)	-55°C / +85°C
Physical characteristics	
Diameter (max)	34mm(1.41 in)
Height (max)	61.5mm(2.44 in)
Typical weight	106g(3.47 oz)
Available termination suffix	radial tabs, radial pins, axial leads, flying leads

Specifications and data are subject to change without notice. Contact Tenergy for latest information.

©2009 Tenergy Corporation. All rights reserved.



**Tenergy Corporation**


436 Kato Terrace

Fremont, CA 94539 U.S.A

Tel: 510-687-0388 ext 308 Fax: 510-687-0328

[www.tenergybattery.com](http://www.tenergybattery.com) email: sales@tenergybattery.com

**ER34615**

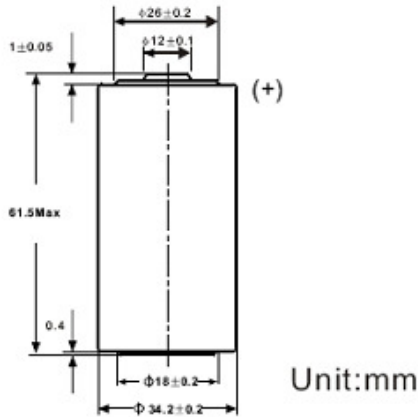

**Key features**

- ▶ High and stable operating voltage
- ▶ Superior drain capability
- ▶ Low self-discharge rate (less than 1% after 1 year of storage at +20°C)
- ▶ Optional stainless steel container for low magnetic and nickel plated steel container for more safe design
- ▶ Hermetic glass-to-metal sealing
- ▶ Notch technology for safety vent is recommended
- ▶ Non-flammable electrolyte

**Main applications**

- ▶ Radiocommunication and other military applications
- ▶ Alarms and security systems
- ▶ Beacons and emergency location transmitters
- ▶ GPS
- ▶ Metering systems
- ▶ Sonobuoys
- ▶ LED lighting applications
- ▶ Others




**Storage**

- ▶ The storage area should be clean, cool (not exceeding +30°C), dry and ventilated.

**Warning**

- ▶ Do not use if the battery casing was mangled.
- ▶ Please discharge the battery few minutes with 100mA
- ▶ Don't use different models of battery in series.
- ▶ Soldering the tag should be finished in few seconds.
- ▶ Do not try to recharge.

**Characteristic curves**

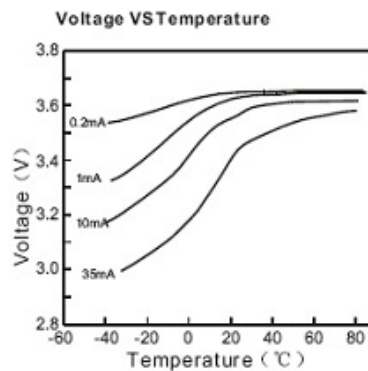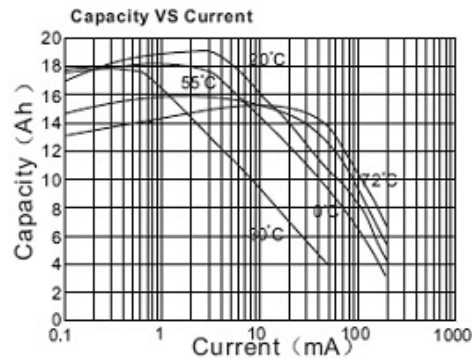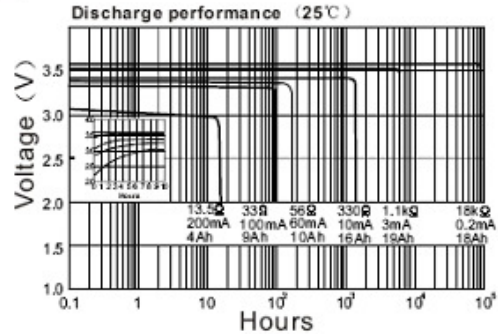

Specifications and data are subject to change without notice. Contact Tenergy for latest information.

©2009 Tenergy Corporation. All rights reserved.